

**Kistler Maschinen-
und Anlagenbau GmbH**
Mackstrasse 84
D-88348 Bad Saulgau, Germany
Tel +49 (0) 75 81 4 88 82-0
Fax +49 (0) 75 81 4 88 82-22
info@kistler-machine.de
www.kistler-machine.de


 **KISTLER**
CUTTING AND WELDING TECHNIQUES

BODETM
www.bode.co.uk

PRODUCT DESCRIPTION

Stationary and traversing turning rolls of the CR series are mainly used in container construction and are available as standard models with load capacities from 1 to 250 tonnes; larger load capacities (up to 1200 tonnes) are available on request.

Depending on the load capacity, the wheels are made of rubber, polyurethane or steel.

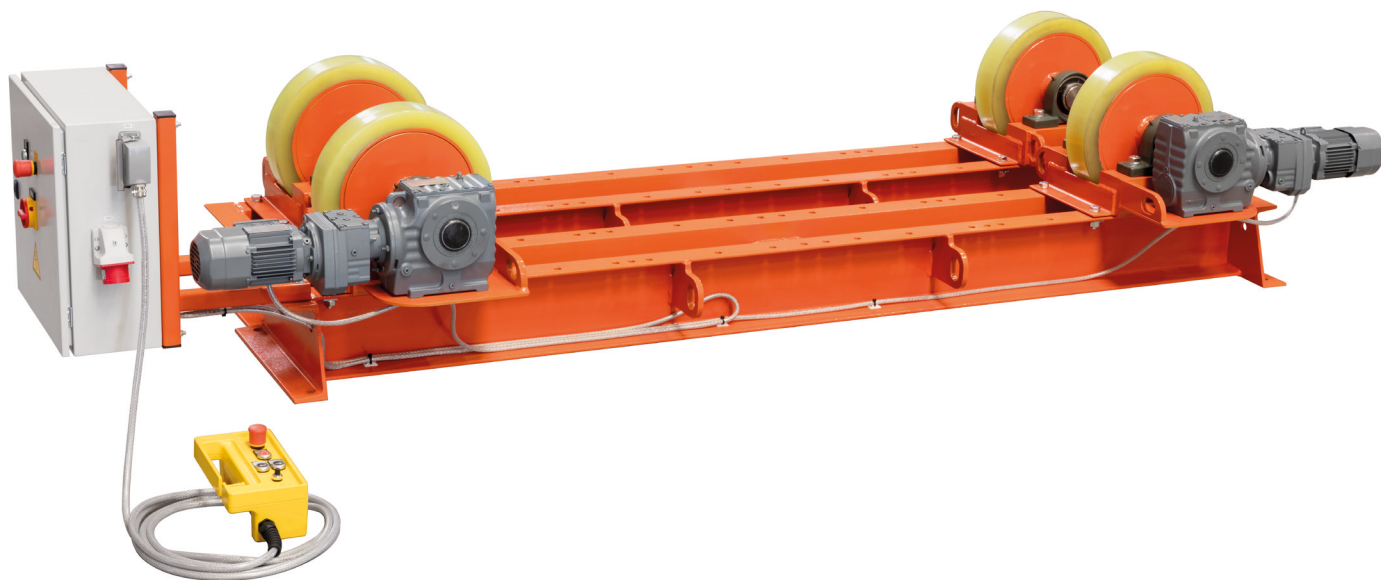


CONVENTIONAL ROTATORS OF THE CR RANGE

**Kistler Maschinen-
und Anlagenbau GmbH**
Mackstrasse 84
D-88348 Bad Saulgau, Germany
Tel +49 (0) 75 81 4 88 82-0
Fax +49 (0) 75 81 4 88 82-22
info@kistler-machine.de
www.kistler-machine.de

 **KISTLER**
CUTTING AND WELDING TECHNIQUES

BODETM
www.bode.co.uk

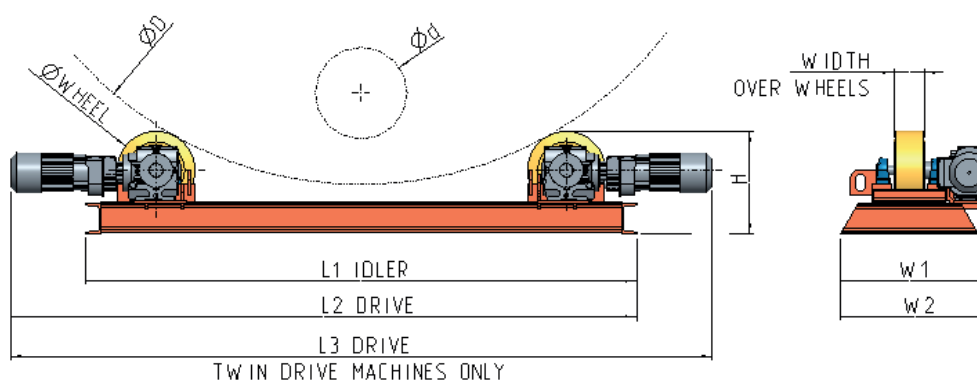

Model No.	Load (Drive+Idler) in t	Diameter		L1	L2	L3	W1	W2	Wheel-ø	Wheel Width	Height
		min.	max.								
CR20	1	180	2750	1635	2000	-	450	555	254	76	349
CR40	2	180	2750	1635	2000	-	450	555	254	102	349
CR60	3	180	2750	1635	2000	-	450	555	254	102	349
CR100	5	600	3000	2130	2530	-	500	540	381	76	540
CR200	10	600	3000	2230	-	2630	500	540	457	76	615
CR400	20	600	4600	2920	-	3320	500	615	457	127	690
CR600	30	600	4600	2940	-	3340	550	675	457	152	745
CR800	40	525	5200	3310	-	3725	700	800	559	178	850
CR1000	50	525	5200	3310	-	3725	700	800	559	203	850
CR1200	60	450	5500	3350	-	3860	850	940	559	260	930
CR1600	80	450	5500	3350	-	3860	900	1105	559	362	930
CR2000	100	450	6000	3350	-	3860	950	1215	559	412	930
CR3000	150	450	6000	3600	-	4150	850	1100	559	150	980
CR4000	200	600	7000	4700	-	5100	900	1300	660	150	1130
CR5000	250	600	7000	4700	-	5100	930	1330	660	180	1130
CR6000	300	800	8000	5000	-	6000	1000	1200	760	180	1280
CR8000	400	800	8000	5000	-	6000	1100	1250	760	220	1380
CR10000	500	1000	8000	5450	-	7300	1300	1450	1000	250	1688

- We reserve the right to alter specifications without prior notice -

CONVENTIONAL ROTATORS OF THE CR RANGE